






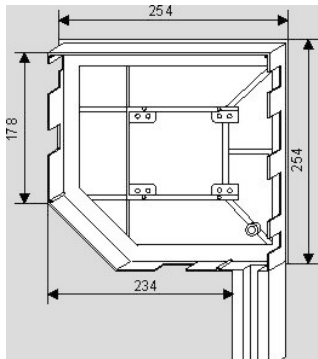
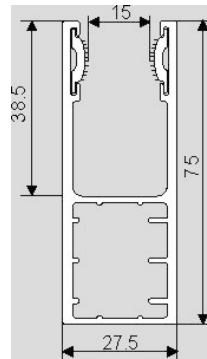
Technical description

Heinzmann-garage door, ready to built in

	<p>shutter container top part and opening are made out of specially formed aluminium sheets.(thickness 1 mm) varnished white, brown or grey, special colours by RAL for surcharge Container at angle of 45°. Sides are made of cast aluminium Octogonal steel shaft 70 mm Ø, galvanized with additional replenishment.</p>
	<p>guide rails guide rails 75 mm out of aluminium with hardened vinyl inlay, above bended open funnel-shaped. Type and colour according to container.</p>
	<p>shutter profile aluminium CT 1450, varnished two times, with polyurethane insulation foam core, detented. End slat according to container colour with vinyl end slat profile.</p>
	<p>use motor 220 VAC, emergency hand crank for surcharge, downroll security unit with electrical switch-off. Remote control including 2-channel manual transmitter with endslat automatic switch-off system for surcharge.</p>
	<p>Security advice: If using remote control unit you have to install an endslat automatic switch-off.</p>

Box size mm	max. height (mm) CT 1450
254	2600

Rail breadth mm	max. breadth (mm)
75	4000

 <p>GKS 254</p>	 <p>75L</p>
---	---